



# Fumechamber™



## Laboratory Fuming Chamber

- Safe, Effective Latent Print Development Using Cyanoacrylate
- Fume Extractor Filters the Chemicals from the Air

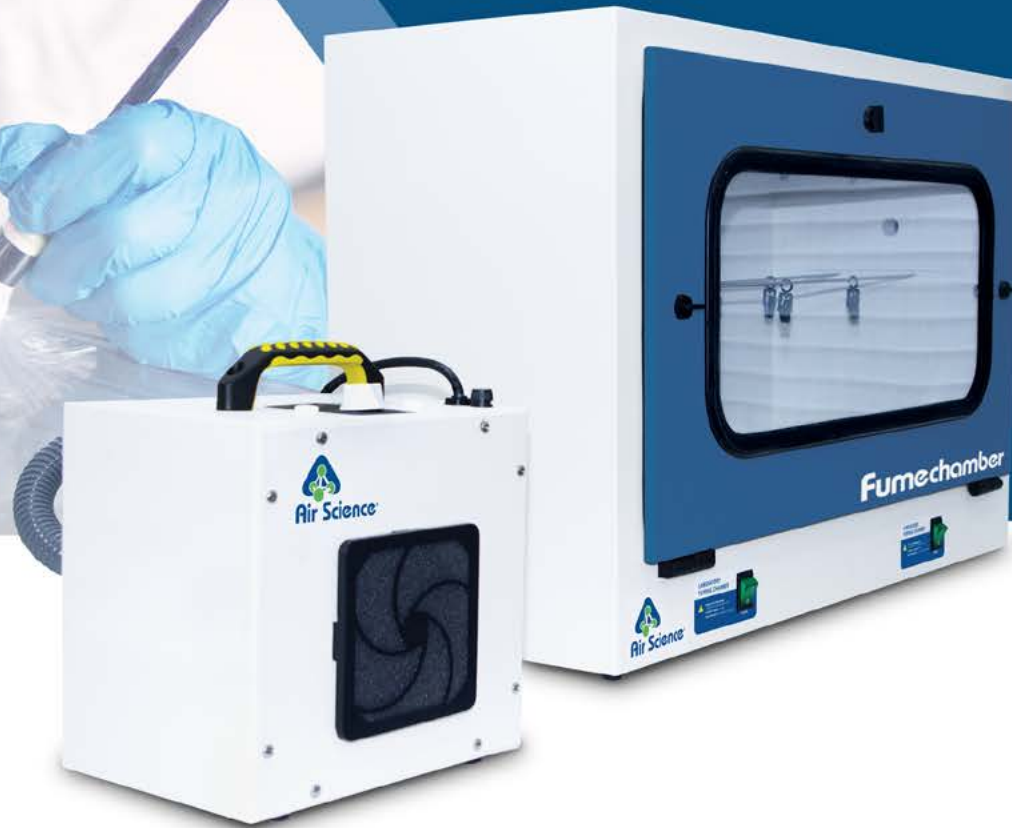

BLC-4 and BLC-EX



"The World's Most Extensive Selection of Containment Solutions."



## CONTENTS:

- Product Overview (p.2)
- Design Features (p.2)
- Specifications (p.3)
- Options & Accessories (p.4)

## INTRODUCTION

The laboratory fuming chamber is an effective way to use cyanoacrylate fuming for latent print development on various surfaces. The Fume Extraction unit allows for safe purging of the cyanoacrylate when the printing cycle is complete.

## APPLICATIONS

Using innovative filtration technology, the Fumechamber creates a safe work environment over the widest range of applications in the industry.

Compounding / Balance Enclosures,  
Microscopes and Robotic Equipment / Forensics /  
Histology / Educational / Microscopy /  
Mobile and Classroom Demonstrations /  
Pharmaceutical / Powder Fingerprinting /  
Powder Weighing / Sample Prep Work / Soldering /  
Solvent Cleaning and Welding / Veterinary / Dental



Deep into its second generation, Air Science embraces the diversity and cultural heritage of the founders and co-workers who are continuing a tradition of excellence. Demonstrating a commitment to adaptation, inclusion and quality output from a United States-based company with a domestic and global reach.

## KEY FEATURES

- In the basic fuming chamber, vapors of cyanoacrylate combine with fingerprint residues and polymerize to form a hard, whitish deposit. Once developed, such prints may either be photographed without further treatment or may be enhanced by dusting with powders for subsequent lifting by tape or stained with dyes.
- The fume extractor is a self-contained cyanoacrylate filtration system that connects directly to the laboratory fuming chambers via the inlet port. The noxious odors and fumes inside the chamber are drawn through an activated carbon filter.

## DESIGN FEATURES

- A. Heating Elements.** Multiple heating elements, operating independently or simultaneously, allow for safe accelerated cyanoacrylate development of latent prints.
- B. Door.** The heater elements are self-limited for precise surface temperatures and a large clear front door panel allows for close monitoring of latent print development.
- C. Inlet Ports.** Two inlet ports will accommodate accessories such as the optional Fume Extractor, portable humidifier and standard fuming wands.
- D. Blower.** The unit is equipped with a low noise blower and built-in timer adjustable for up to 30 minute cycles, as well as a continuous running position.
- E. Timer.** Select the extraction time needed and handle other tasks while the fume extraction unit purges harmful vapors from the chambers.



BLC-6.5




BLC-EX

Specifications are subject to change without notice or obligation on the part of Air Science. For questions contact Air Science.

<sup>1)</sup> Energy consumption disclosure is based on internal testing with primary filters during normal operation. Power consumption published is nominal and dependent on cabinet size.

**CONTENTS:**

- Product Overview (p.2)
- Design Features (p.2)
- Specifications (p.3)
- Options & Accessories (p.4)

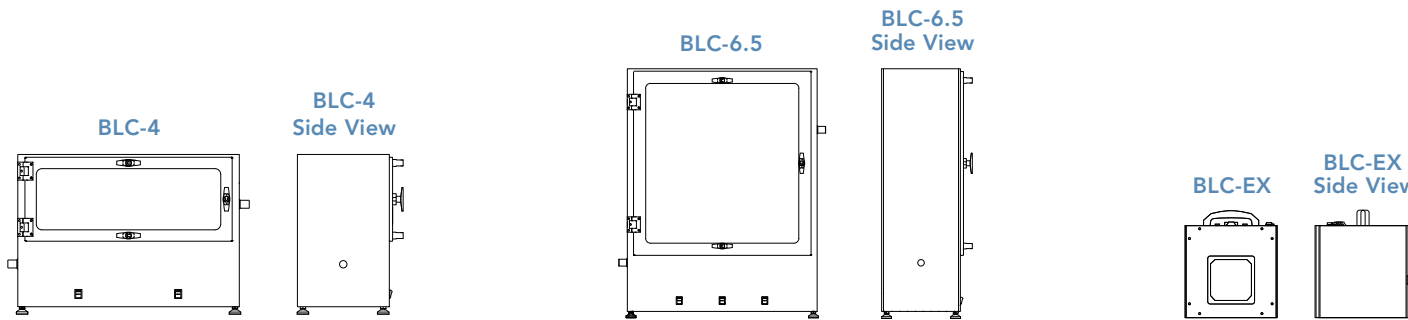

MODEL	DIMENSIONS			WEIGHT (LBS/KG)	
	Internal (W × D × H)	External (W × D × H)	Shipping (W × D × H)	Net	Ship
<b>Fuming Chamber</b>					
BLC-4	30.5" × 12.5" × 17" / 775 × 318 × 432 mm	31" × 13" × 21" / 787 × 330 × 533 mm	36" × 13" × 26" / 914 × 330 × 660 mm	27 / 12	30 / 14
BLC-6.5	30.5" × 12.5" × 31" / 775 × 318 × 787 mm	31" × 13" × 34" / 787 × 330 × 864 mm	36" × 18" × 36" / 914 × 457 × 914 mm	43 / 19	45 / 20
<b>Fuming Extraction Unit</b>					
BLC-EX	--	9.5" × 9.5" × 9.5" / 241 × 241 × 241 mm	16" × 16" × 16" / 406 × 406 × 406 mm	17 / 7	19 / 9

**CONTENTS:**

- Product Overview (p.2)
- Design Features (p.2)
- Specifications (p.3)
- Options & Accessories (p.4)

**Fuming Chamber****PRODUCT SPECIFICATIONS**

Construction	BLC-4	BLC-6.5
Finish	<... White epoxy coated steel. ...>	
Door	<... UV absorbing transparent window. ...>	
Controls	<... Hotplate On/Off. ...>	
Electrical	<... 120V, 60Hz or 230V, 50Hz voltages available. Specify when ordering. Other voltage options available. ...>	
Number of Hotplates	2	3
Hanging Bar Levels	2	3
Hanging Rod / Clips	4 / 16	6 / 24
Intel Ports	2	

**Fume Extraction Unit****PRODUCT SPECIFICATIONS**

Construction	BLC-EX
Finish	<... White epoxy coated steel. ...>
Controls	<... Adjustable timer for Mains On/Off. ...>
Electrical	<... 120V, 60Hz or 230V, 50Hz voltages available. Specify when ordering. Other voltage options available. ...>
Hose Length	<... 36" / 914 mm. ...>
Carbon Filter	<... 3 lbs / 76 kg. ...>

**FILTER SUMMARY\***

Formula	Description
GP Plus!	The most widely used filter in the range, primarily for solvent, organic and alcohol removal.
HEPA/UPLA	Powders and particulates.

\*Other formulas may be available.

**OPTIONS & ACCESSORIES****Fuming Chamber**

Portable Humidifier and Hose	External humidifier accelerates development of prints	PHUM-BLC
------------------------------	---	----------

**CONTENTS:**

- Product Overview (p.2)
- Design Features (p.2)
- Specifications (p.3)
- Options & Accessories (p.4)

## WARRANTY

This product is protected by the Air Science **Legacy Lifetime Warranty™** which starts on the date of shipment from our factory. This limited warranty is the result of thousands of successful Air Science production applications in pharmaceutical, laboratory, forensic, industrial and educational applications.

This warranty covers defects in materials and workmanship. Our liability under the Legacy Lifetime Warranty is, at our option, to repair or replace any defective parts of this equipment if you document that these parts were defective at the time we sold the product to you. Normal conditions apply.



For details visit the [Service section](#) of our website at [www.airscience.com](http://www.airscience.com).

## STANDARDS & COMPLIANCE

Quality Management Systems	ISO 9001:2015
Environment	ISO 14001:2015 ENERGY STAR® Partner



120 6th Street \ Fort Myers, FL 33907  
T. 239-489-0024 \ **Toll Free.** 800-306-0656 \ F. 800-306-0677  
[www.airscience.com](http://www.airscience.com)

The information contained in this manual and the accompanying product are copyrighted and all rights are reserved by Air Science. Air Science reserves the right to make periodic minor design changes without obligation to notify any person or entity of such change.

